



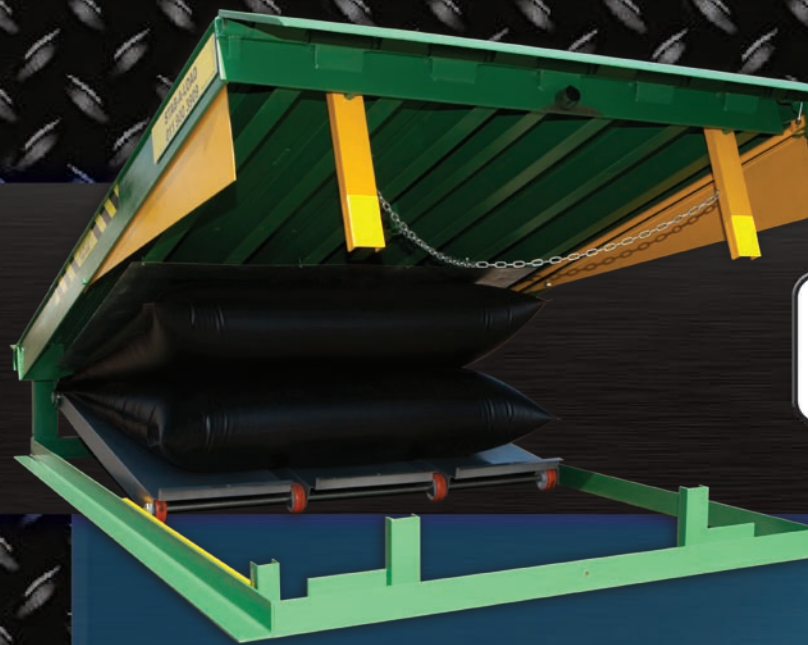


STAB-A-LOAD
DOCK LOADING SOLUTIONS BUILT TO LAST...

LX Dock Leveller



Standard Features:

- Robust design
- 9 IPE deck support stiffeners capable of withstanding impact from 3 wheel forklift trucks.
- 10 000 kg standard carrying capacity.
- Deck construction from 6/7 safety tread plate (3 pieces).
- Imported dual airbag made from TS 55 hypalon fabric – APS kit.
- Gravity lip extension arm. No hydraulic cylinders or springs required.
- 220V, 1Ph, 50Hz, 20 amp power supply. No compressed air required. Low pressure high volume.
- Toe guard sliders.
- 16 mm heavy duty smooth plate lip.
- Reinforced piano style lip hinge with rubber lip stops.
- 2 "D" type rubber dock bumpers supplied standard.
- Lift mechanism can be easily removed and maintained outside of the pit.
- Safety chevron markings on side rails.
- Below level fall safe legs.
- Top deck tilt flex (up to 120 mm) to accommodate varying truck floors.
- Lip cancel upon truck impact

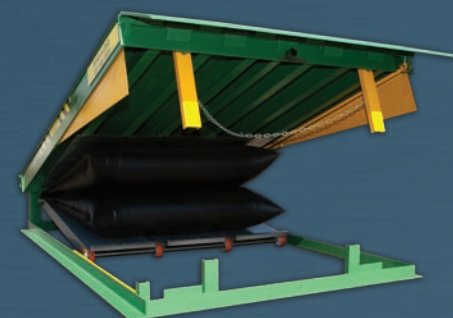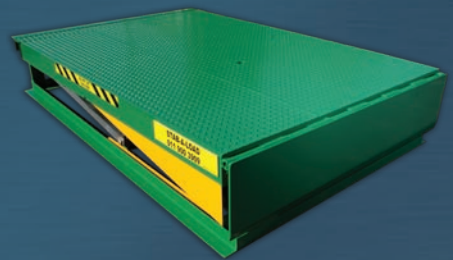

Optional Extras:

- Safety tread lip (sandwich type)
 - 6/7 Safety tread on smooth plate
- 15 000 kg Capacity
- Galvanised base frame
- Kelley heavy duty laminated dock bumpers
- Pit kit (box design) to assist the contractor to cast the base at the dock pit in the dock
- Free standing dock modules
- Stainless steel 304 construction
- Truck wheel guides
- Dock Light
- Vehicle restraint
- Dyna brush seals

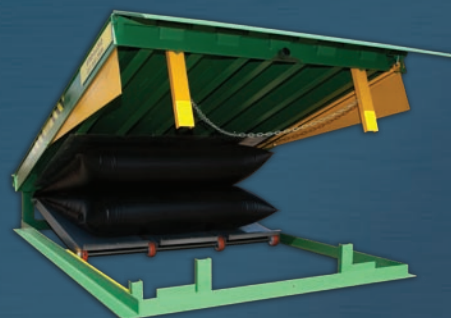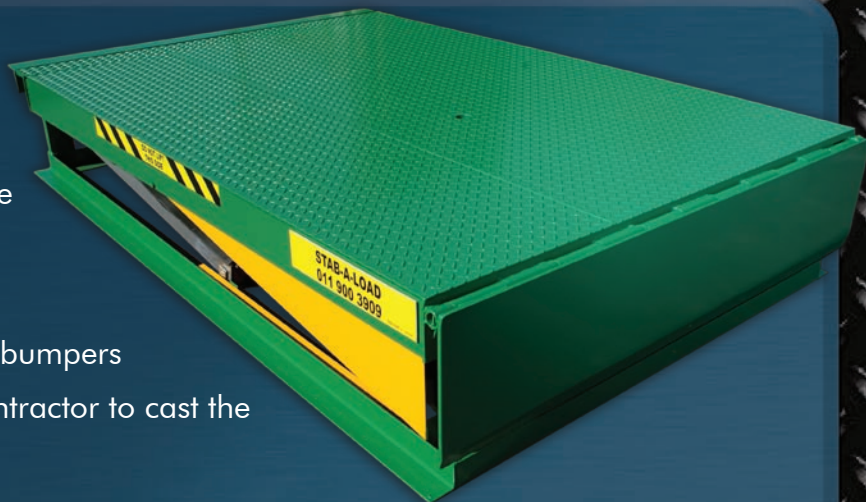

Working Range:

- Optimal dock height set at 1 350 mm to 1 500 mm
- 320 mm above the dock height and 200 mm below the dock height

MODEL	LENGTH	WIDTH	HEIGHT
LX 610 Dock Leveller	2 845 mm	1 810 mm	500 mm
Pit Size	2 845 mm	1 860 mm	500 mm
LX 608 Dock Leveller	2 220 mm	1 810 mm	500 mm
Pit Size	2 220 mm	1 860 mm	500 mm
LX 612 Dock Leveller	3 420 mm	1 810 mm	500 mm
Pit Size	3 420 mm	1 860 mm	500 mm
LX 710 Dock Leveller	2 845 mm	2 110 mm	500 mm
Pit Size	2 845 mm	2 150 mm	500 mm
LX 708 Dock Leveller	2 220 mm	2 110 mm	500 mm
Pit Size	2 220 mm	2 150 mm	500 mm
LX 712 Dock Leveller	3 420 mm	2 110 mm	500 mm
Pit Size	3 420 mm	2 150 mm	500 mm



Tel: +27 11 900 3909
 Fax: +27 11 900 2559
 Email: sales@stabaload.co.za
www.stabaload.co.za

PO Box 145700
 Bracken Gardens
 1452